

L-864 LED OBSTRUCTION LIGHTS

FAA Type: L-864 Flashing Red Obstruction Light
ICAO Type: Medium Intensity Obstacle Light

ETL Certified to:

FAA Advisory Circular AC 150/5345-43E

Compliant to:

Canadian Aviation Regulation CAR 621.19; ICAO Annex 14, MIL-C-7989, DGAC of Mexico

Use


The FarLight L-864LED3 Obstruction Light provides an LED based solution to the FAA L-864 style of flashing red obstruction lights. The L-864LED3 is available in 120 & 240 VAC or 48 VDC configurations. Applications include arctic environments when ordered with optional arctic kit (AK).

NOTE: L-864LED3 MUST BE OPERATED WITH SURGE ARRESTOR

- Lasts up to 20 times longer than incandescent lighted L-864
- 95% less power consumption than an equivalent incandescent unit
- 70-watts total power consumption; 18 lbs total weight
- Can be flashed or steady burn (controller not supplied)
- Creates no EMI/RFI
- Resistant to shock and vibration
- Direct mounting to existing bolt pattern
- 5 year warranty



MECHANICAL DIMENSIONS

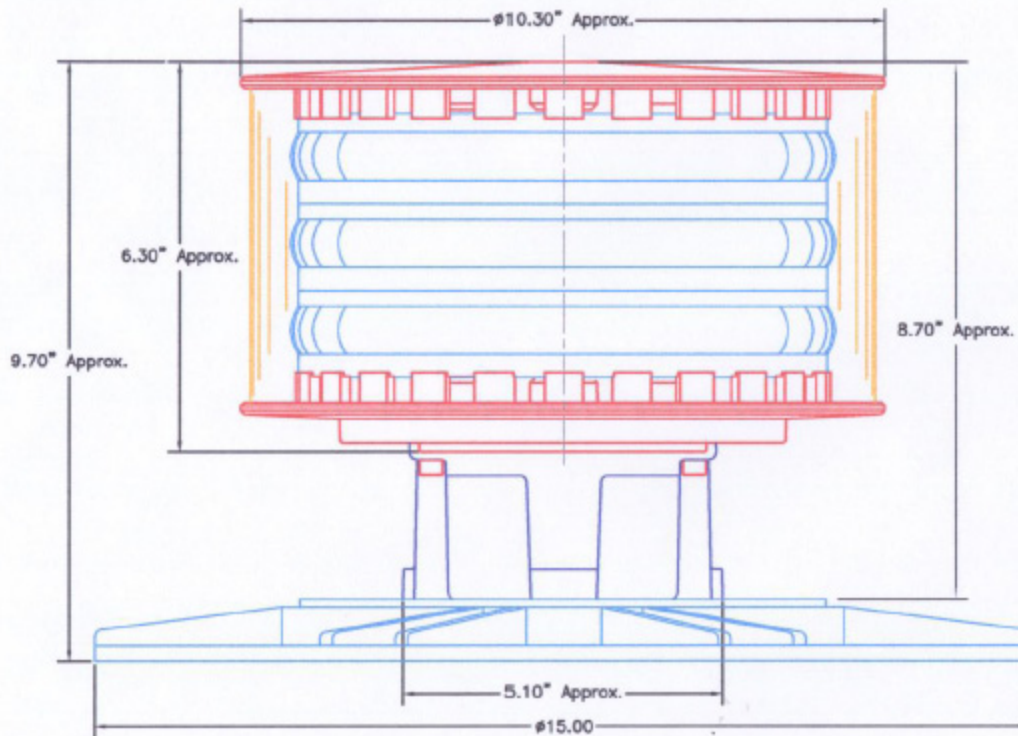

L-864LED3 BEACON LIGHT

SHIPPING INFORMATION

PART NUMBER	APPROX. SHIP WEIGHT	CARTON DIMENSIONS
864LED3 (all models)	18 lbs (8 kg)	16" x 16" x 14"